
J C GROUP™

Rima Machines Pvt Ltd

No big words but a promise to work





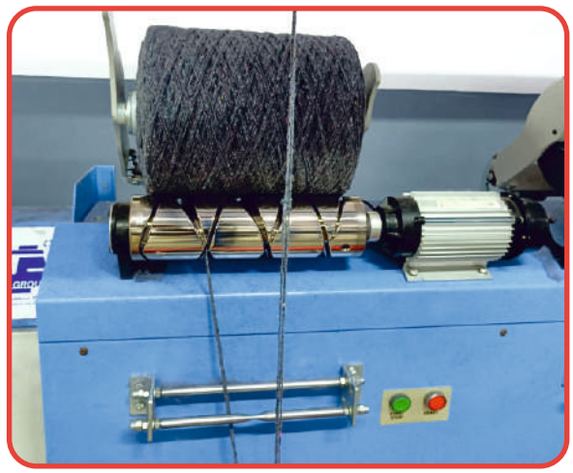

JC-123 Assembly Winder with EXT CREEL

		ASSEMBLY WINDER 8" TRAVERSE with EXT CREEL	ASSEMBLY WINDER 10" TRAVERSE with EXT CREEL
No. of Positions/Drums	:	4 to 72	4 to 72
No. of Positions/Section	:	4	4
No. of Ply	:	4 To 12	4 To 12
Stop Motion	:	Provided	Provided
Type of Stop Motion	:	Optical Sensor for Individual End and Electro-Magnetic Brake on individual motor to stop the same instantly in case of any end breakage.	Optical Sensor for Individual End and Electro-Magnetic Brake on individual motor to stop the same instantly in case of any end breakage.
Cradle Package Holder	:	Double Arm Package Holder with Ball Bearing and Adopters	Double Arm Package Holder with Ball Bearing and Adopters
Take-up Package	:	Parallel Cheese or Cone having conicity up to 3*30' and length upto 230mm	Parallel Cheese or Cone having conicity up to 3*30' and length up to 290mm
Traverse	:	200 mm	254 mm
Yarn Content	:	Up to 4 kg	Up to 8 kg
Traverse System	:	Aluminum Hard Anodized Drum with Ceramic Inserts Optional: Cast Steel or Bakelite Drums	Cast Steel Drum with Ceramic Inserts
Feed Package	:	Up to 8 Ply Cone or Cheese having Dia up to 300mm For 9-12 Ply Cone or Cheese having Dia up to 250mm	Up to 8 Ply Cone or Cheese having Dia up to 300mm For 9-12 Ply Cone or Cheese having Dia up to 250mm
Yarn Speed	:	Up to 800MPM	Up to 800MPM
Individual Length Counter	:	Electronic Length Counter for Individual Position is Provided. Electro-Magnetic Cutter per Drum to cut the ends in case of set length is achieved.	Electronic Length Counter for Individual Position is Provided. Electro-Magnetic Cutter per Drum to cut the ends in case of set length is achieved.
Anti-Patterning Device	:	Provided – Electronic	Provided – Electronic
Connected Load	:	0.75 to 13.5 KW	0.75 to 13.5 KW
Motors	:	Individual Motor per Drum	Individual Motor per Drum
A. C. Variable Drives	:	Provided to Vary the Winding Speed	Provided to Vary the Winding Speed
Dimensions			
Length	:	1600-1200-22000 (5'3"-3'11"-72'2")	1600-1200-22000 (5'3"-3'11"-72'2")
Width	:	5200 (17') With Extended Creel	5200 (17') With Extended Creel
Height	:	2250 (7'4")	2250 (7'4")

Features

- High Speed Assembly Winder with External Creel to make parallel wound package of 4 to 24 ply yarn
- Individual Drum having Individual Motor Driven with Individual Inverter facilitates multiple running parameters for different yarns in single machine
- Package stops instantly on detecting any missing end, avoids single end going inside the package, thanks to efficient clutch brake on individual drum and longer yarn path. It helps in achieving single end knotting and avoids faulty multiple end knotting of coarser yarn
- Supplied with long life Cast Steel Drum suitable to work different types of Spun as well as Filament Yarns

For Product Range Please Visit Our Website www.jcmachine.com

THE INFORMATION SUPPLIED IN THE BROCHURE IS FOR GUIDANCE ONLY.
WE RESERVE OUR RIGHT TO MODIFY THESE AT ANY TIME.

J.C.GROUP™
Rima Machines Pvt Ltd
Plot No.C-23/3-5, Road No.15, Hojiwala Ind. Estate, Vanz, SACHIN SURAT - GJ 394230 INDIA
Call: +91 93747 38545 / 98251 83836 Web: www.jcmachine.com Email : rimamachines@gmail.com / info@jcmachine.com

Pixel Image 098251 86810